

電磁閥-製品一覽表

●●良好/Good ●可/Available

項次	圖型	型號	口徑	材質	適用功能	適用壓力 kg/cm2	流體溫度	蒸氣	水	空氣	油	瓦斯	真空	備註
1		UD-6	1/8"	鍛造銅	小流量 直動通電開	0~7	-5℃~80℃		●●	●●	●	●	●	
2		UD-8	1/4"	鍛造銅	小流量 直動通電開	0~7	-5℃~80℃		●●	●●	●	●	●	
3		UD-10	3/8"	鍛造銅	小流量 直動通電開	0~10	-5℃~80℃		●●	●●	●	●	●	
4		UD-15	1/2"	鍛造銅	小流量 直動通電開	0~3	-5℃~80℃		●●	●●	●	●	●	
5		UPS	1/2"~1"	鍛造銅	大流量高頻率 耐磨複動 活塞引導式 通電開需備壓 0.2kg	0.2~10	-5℃~185℃	●●	●●	●●	●			
6		US	1/2"~2"	鑄造銅	大流量高溫高壓 複動活塞引導式 通電開需備壓 0.5kg	0.5~15	-5℃~185℃	●●	●●	●●	●			
7		USF	1/2"~2" (法蘭)	鑄造銅	大流量高溫高壓 複動活塞引導式 通電開需備壓 0.5kg	0.5~15	-5℃~185℃	●●	●●	●●				
8		USFF	1-1/4"~4" (法蘭)	FC-20	大流量高溫高壓 複動活塞引導式 通電開需備壓 0.5kg	0.5~15	-5℃~185℃	●●	●●	●●	●			
9		UW	3/8"~2"	鍛(鑄)造銅	大流量直複動 連結膜片式 通電開	0~5(液體) 0~7(氣體)	-5℃~80℃		●●	●●	●			
10		UWF	1/2"~2" (法蘭)	鍛(鑄)造銅	大流量直複動 連結膜片式 通電開	0~5(液體) 0~7(氣體)	-5℃~80℃		●●	●●	●			
11		UWFF	1-1/4"~4" (法蘭)	FC-20	大流量複動 膜片引導式 通電開需備壓 0.2kg	0.2~8	-5℃~80℃		●●	●●				
12		UG	3/8"~2"	鍛(鑄)造銅	大流量直複動 連結膜片式 通電開 (瓦斯專用)	0.7	-5℃~80℃		●	●		●●	●●	
13		UA-8	1/4"	鍛造銅	小流量直動 通電開 (氣缸控制專用) 斷電排氣	0.7	-5℃~80℃		●●	●●			●	


Di-HEN
SOLENOID VALVE

Di-HEN®



流體自動控制專用
電磁閥

水, 空氣, 蒸氣, 輕、重油, 瓦斯, 真空, 具腐蝕性等流體

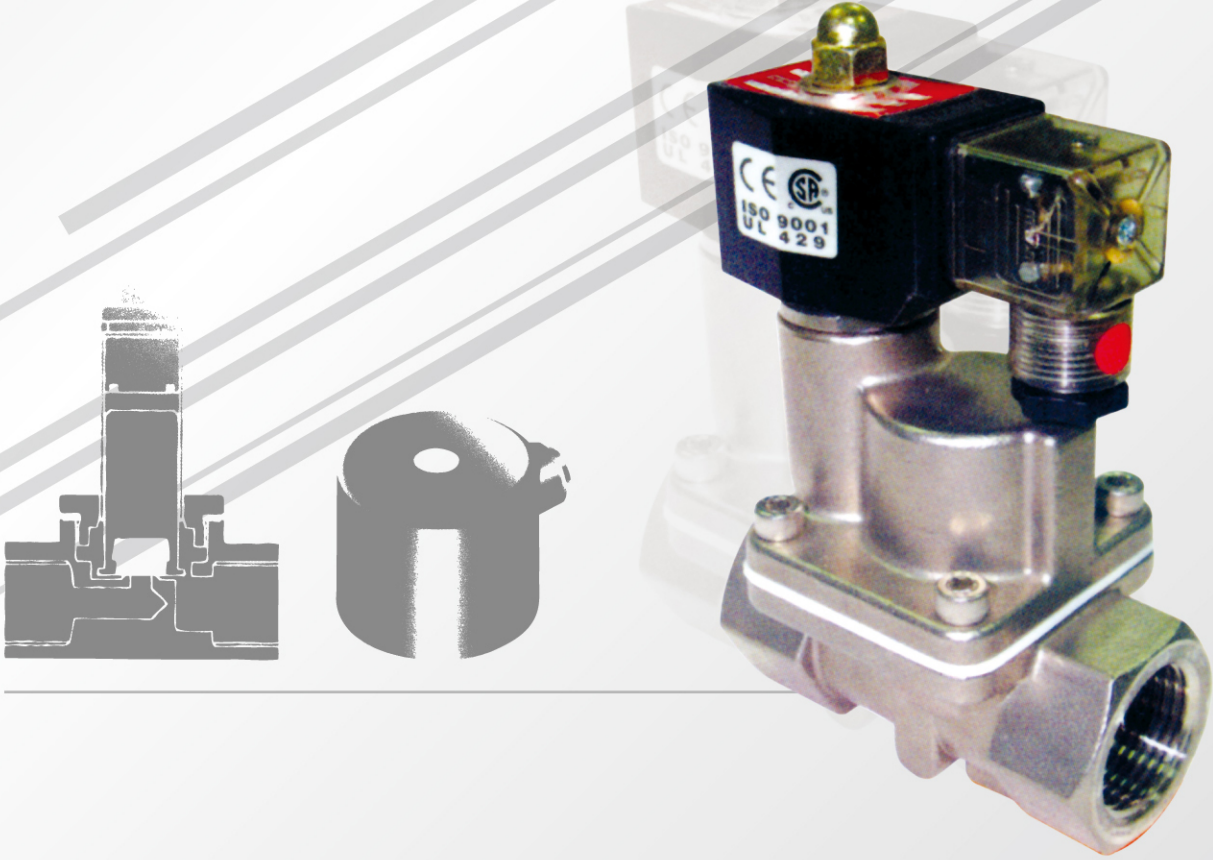

嘉虹塑膠

塑膠閥門與管配件
及各式電磁閥的專業製造銷售

桃園縣八德市和強路463-8號

TEL : 03-3633642 · 3633647

FAX : 03-3634686

E-mail : chia3633642@hotmail.com

電磁閥 - 製品一覽表

●●良好/Good ●可/Available

項次	圖型	型號	口徑	材質	適用功能	適用壓力 kg/cm2	流體溫度	蒸氣	水	空氣	油	瓦斯	真空	備註
14		UA-10	3/8"	鍛造銅	小流量 直動通電開 (氣缸控制專用) 斷電排氣	0~10	-5℃~80℃		●●	●●			●	
15		UAO	1/4"~1/2"	銅	大流量 空氣重油專用 複動活塞引導式 通電開需備壓 0.5kg	0.5~15	-5℃~80℃		●	●●	●●			
16		UAW	1/2"~2"	鑄造銅	大流量 高壓複動活塞 引導式通電開 需備壓0.5kg	0.5~15	-5℃~80℃		●●	●●				
17		SUS-6	1/8"	SUS#316	白鐵316小流量 直動通電開	0~7	-5℃~185℃	●●	●●	●●	●	●	●	
18		SUS-8	1/4"	SUS#316	白鐵316小流量 直動通電開	0~7	-5℃~185℃	●●	●●	●●	●	●	●	
19		SUS-10	3/8"	SUS#316	白鐵316小流量 直動通電開	0~10	-5℃~185℃	●●	●●	●●	●	●	●	
20		SUS-316	1/2"~2"	SUS#316	白鐵316大流量 複動活塞 引導式通電開 需備壓0.2kg	0.2~10	-5℃~185℃	●●	●●	●●	●			
21		SUW-316	1/2"~2"	SUS#316	白鐵316大流量 直複動連結 膜片式通電開	0~5(液體) 0~7(氣體)	-5℃~185℃		●●	●●	●	●	●	
22		SUWF	1/2"~2" (法蘭)	SUS#316	白鐵316大流量 直複動連結 膜片式通電開	0~5(液體) 0~7(氣體)	-5℃~80℃		●●	●●	●	●	●	
23		SUS-304	1/2"~1"	SUS#304	白鐵304大流量 高壓複動 活塞引導式 通電開需備壓 0.5kg	0.5~15	-5℃~185℃	●●	●●	●●	●			
24		UDC	1/4"~1/2"	PVC	耐酸鹼 直動膜片式 通電開	0~1	-5℃~80℃		●●	●				
25		UDTF	1/2"~1"	PTFE	耐強酸鹼 直動膜片式 通電開	0~1, 0~0.5	-5℃~80℃		●	●				

電磁閥 - 製品一覽表

●●良好/Good ●可/Available

項次	圖型	型號	口徑	材質	適用功能	適用壓力 kg/cm2	流體溫度	蒸氣	水	空氣	油	瓦斯	真空	備註
26		UDNO	1/8"~1/4" 3/8"	鍛造銅	小流量 直動通電開 (常開型)	0~7, 0~10	-5℃~80℃		●●	●●	●	●	●	
27		UWNO	3/8"~2"	鍛(鑄)造銅	大流量直複動 連結膜片式 通電開(常開型)	0~5	-5℃~80℃		●●	●●	●	●	●	
28		SUSNO	1/4"~3/8"	SUS#316	白鐵316小流量 直動通電開 (常開型)	0~7	-5℃~100℃		●●	●●	●			
29		SUW 316NO	1/2"~2"	SUS#316	白鐵316小流量 直動通電開 (常開型)	0~5	-5℃~80℃		●●	●●	●	●	●	
30		UPSNO	1/2"~1"	鍛造銅	大流量高頻率 耐磨複動活塞 引導式通電開 需備壓0.2kg	0.2~10	-5℃~100℃		●●	●●	●			訂製品
31		SUS 316NO	1/2"~2"	SUS#316	白鐵316大流量 複動活塞 引導式通電開 需備壓0.2kg	0.2~10	-5℃~100℃		●●	●●	●			訂製品
32		USFFNO	1-1/4"~4" (法蘭)	FC-20	大流量高溫 高壓複動 活塞引導式 通電開需備壓 0.5kg	0.2~10	-5℃~185℃		●●	●●	●			訂製品
33		UWFFNO	1-1/4"~4" (法蘭)	FC-20	大流量複動 膜片引導式 通電開需備壓 0.2kg	0.2~8	-5℃~80℃		●●	●●				訂製品
34		PKS 防爆型	1/2"~1"	鍛造銅	防爆型 複動活塞引導式 通電開需備壓 0.5kg	0.5~10	-5℃~80℃		●●	●●	●			訂製品
35		SKS 防爆型	1/2"~2"	SUS#316	防爆型 複動活塞引導式 通電開需備壓 0.5kg	0.5~10	-5℃~80℃		●●	●●	●			訂製品
36		PKW 防爆型	1/2"~2"	鍛造銅	防爆型 大流量直複動 連結膜片式 通電開	0~5(液體) 0~7(氣體)	-5℃~80℃		●●	●●	●	●●	●	訂製品
37		SKW 防爆型	1/2"~2"	SUS#316	防爆型 大流量直複動 連結膜片式 通電開	0~5(液體) 0~7(氣體)	-5℃~80℃		●●	●●	●	●●	●	訂製品